e-mail: info@polanik.com tel. +48 44 646 44 81 www.polanik.com tel. +48 44 648 50 89

J polanik.


POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski

fax +48 44 646 43 58

TECHNICAL SPECIFICATION

Stop mat for sprints SM-6x2 RSM-5x2

PSM-6x2

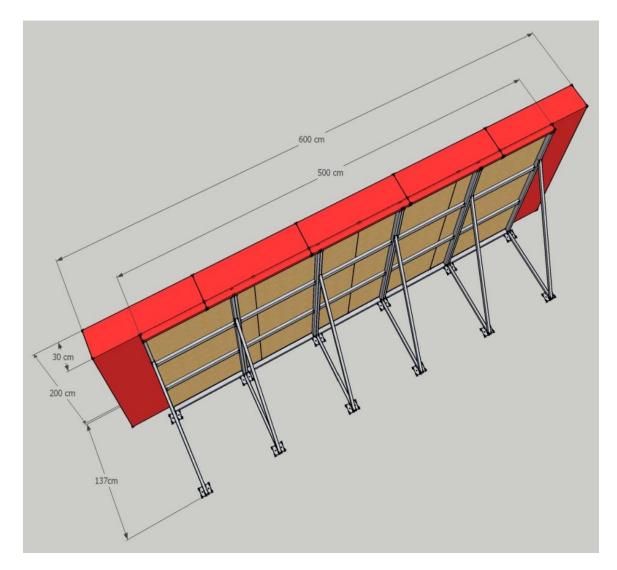

File: 2016-06-08


PRODUCT SUPPORT Paweł Ciechanowski p.ciechanowski@polanik.com POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski

tel. +48 44 646 44 81 tel. +48 44 648 50 89 fax +48 44 646 43 58 e-mail: info@polanik.com www.polanik.com



1. General description and use

Stop mat is assembled on plywood attached to the steel galvanized frame. Mats occur after 50 cm beyond protecting frame before hitting its edge. They are attached to the frame with Velcro straps and clip and Velcro on plywood frame. Stop mat is equipped with steel frame (RSM-5x2) and cover (PSM-6x2).

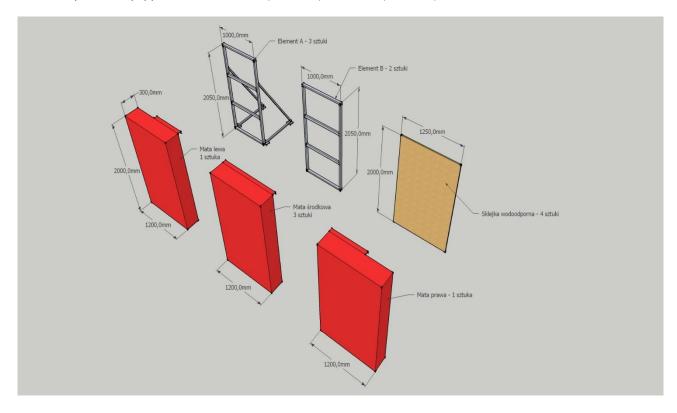

Stop mat - elements

2. Technical specification

Code	SM-6x2		
Description	Stop mat on the track		
	filling - foam		
Material	undersurface and sides - PCV		
	front – anti-spikes net		
Height [cm]	200		
Width [cm]	120		
Thickness [cm]	30		
Image			

POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski

tel. +48 44 646 44 81 tel. +48 44 648 50 89 fax +48 44 646 43 58 e-mail: info@polanik.com www.polanik.com



Code	RSM-5x2		
Description	Supporting frame made of closed profiles, bolted to the concrete floor. It consists of a rack and		
	plywood screwed with the possibility of disassembly and storing during winter period.		
Material	galvanized steel		
Height [cm]	205		
Width [cm]	500		
Length [cm]	approx. 107 (without mats)		
Image			

Code	PSM-6x2			
Description	Waterproof stop mat and frame cover			
Material	PCV			
Fastening	velcro (on both sides)			
Image	Spice polynows in a rzey (ra ebu bolach)			

POLANIK Poland, Życzliwa 11 97-300 Piotrków Trybunalski e-mail: info@polanik.com www.polanik.com



3. Maintenance and storing

Due to the hygiene requirements it is recommended that the landing area should be cleaned regularly with commonly available detergents. Before you start wiping the landing area, please try to clean a small spot on its bottom side in order to check the reaction with the PVC fabric. They cannot be bent or pressed by any objects during storing. That may deform the segments permanently. A storing facility should be clean and dry. It ought to provide min. temperature 5° C.

4. Packing and transport

The product is sent in parts, in foil and on the pallets.



5. Declaration

1) No. 2016-06-08

2) Issuer's name: POLANIK Sp. z o. o. Issuer's address: Zyczliwa 11, 97-300 Piotrkow Tryb.

3) Objects of declaration

No.	Name	Code
1	Stop mat on the track (6 x 2 x 0,3 m)	SM-6x2
2	Steel galvanized frame (5 x 2 x 1 m)	RSM-5x2
3	Waterproof cover (6 x 2 x 1 m)	PSM-6x2

4) Technical specification described above is in accordance with the factory's internal engineering standards.

Additional Information

5) Declaration for:

Buyer/Distributor/User

Signed for and in behalf of: POLANIK

2016-06-08 Piotrkow Tryb. (Date and place of issue)

6) Pawel Ciechanowski Product Manager

.....

(Signature or equivalent authorized by the issuer)

(Name, function)

.....